


ROM 900

High pressure sewer jetting trailer

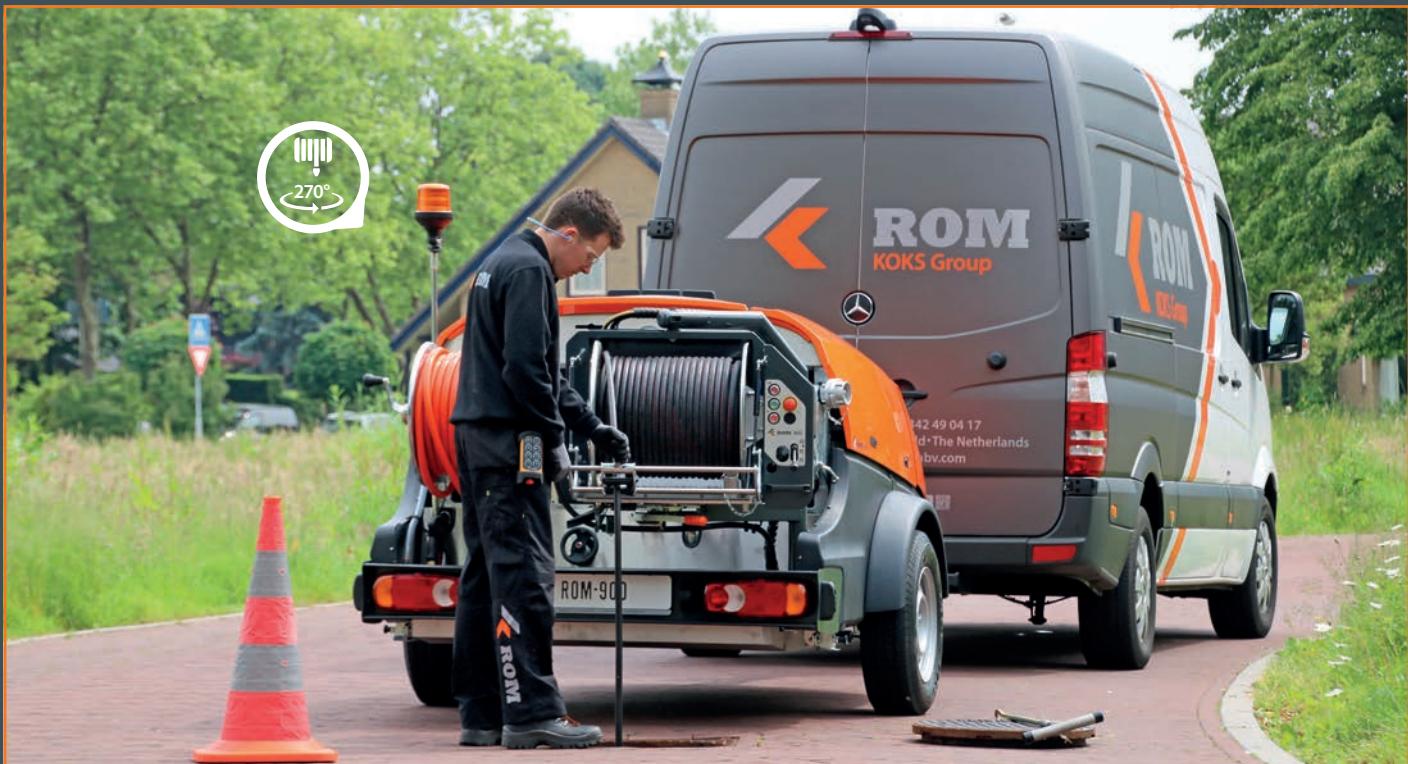

Meet the powerful ROM 900 sewer cleaning trailer.

Stylish design. Superior user-friendliness. Its attractive design and exceptionally complete range of equipment distinguish ROM 900 from all other sewer cleaning trailers. The professional ROM 900 is suitable for the unblocking and cleaning of lateral lines and main lines in the sanitary sewer system of up to Ø600mm. The ROM 900 trailer can easily be expanded with a system for oil spillage control and drainage cleaning.

Innovative design

The ROM 900 combines attractive design with optimum ease of operation. The low centre of gravity ensures unprecedented stable and safe road holding, both with empty and full water tank. The sophisticated frame ensures a very low dry weight. The innovative design also has a very low drag coefficient, which saves fuel.

Optimum efficiency

A radial swivel joint, designed in house, ensures maximum efficiency at the end of the sewer jetting hose.

Toolboxes

There are two large, lockable and water resistant toolboxes on either side of the trailer.

User friendly

The ROM 900 has a handy open storage compartment for your hoses. The machine is also fitted with a 270° rotating high pressure reel with a range of 1 metre outside the trailer. The reels have been positioned at an optimum working height on the basis of European research. The control panel and stainless steel drip tray always rotate along with the hydraulically driven HP reel. An important advantage is that this reel can be used immediately without having to pivot out.

Noise insulated

The trailer is fitted with an advanced noise insulation package (72dB) as standard. This prevents complaints from people in the vicinity and ensures that you can conduct your work comfortably and with pleasure.

Extensive choice of water tank capacities

The water tank is excellently protected because it is integrated into the trailer. The overflow can be adjusted as desired, depending on the maximum trailer weight of the vehicle. This gives you an unrestricted choice of 500 up to 900 litres effective water tank capacity.


Durable and low maintenance

The ROM 900 is extremely durable and low maintenance. Features such as a hot-dip galvanised frame/chassis and the double insulated stainless steel damper will leave you in no doubt about this. The covers and bottom panels are made of flexible impact-resistant material. The large opening angle of the bonnet makes it easy and simple to access components for service and maintenance.

Options? See next pages

For more info, go to rombv.com

Technical information



Suitable for

Unblocking and cleaning of drains and sewers up to max Ø600mm.
Facade, surface, and drain cleaning and graffiti removal

Drive

Water-cooled industrial petrol engine or water-cooled diesel
Electronic starting system

High pressure pump

Speck 3 plunger high pressure pump
Cleaning pressure up to max. 210 bar and a water capacity up to max. 100 l/min

High pressure reel

Hydraulically operated
Solid electro galvanised
Suitable for max. 120m ½" (ND13) sewer jetting hose

Conservation

Base frame / chassis entirely hot-dip galvanised
Plating powder coated RAL 7016 Anthracite grey, impact-resistant side and bottom panel PE (RAL 7016) Polyester covers in RAL 9010 Pure white


Standard features include i.a.

Spacious 900-litre water tank and 30-litre fuel tank
Two large tool boxes (lockable) & Open storage box (for storage of hoses etc.)
270° rotational, hydraulic HP reel (180°+90°) with extendable hose guiding system & control panel that swivels along with reel
Manually operated water filling reel incl. 50m. 3/4" water hose (ND20)
Double insulated stainless steel exhaust silencer
Dry run protection for HP pump

Advantages

- Hydraulically driven HP reel (infinitely adjustable)
- Operating panel / electronics are installed in a lockable, vandal and water proof tool box
- Rotating control panel next to the HP reel, mounted at an ergonomic height
- Rotating stainless steel drip tray protecting the machine from dirt
- Transparent fuel tank
- Lockable bonnet with wide opening angle; perfect for maintenance and servicing of the engine/pump combination
- Heat exchanger for perfect temperature control

Article number	02292	022925	02294	022945	02296	022965	02298	022985
Version	ROM 900 200/60 Diesel	ROM 900 210/60 Industrial Petrol	ROM 900 150/75 Diesel	ROM 900 150/75 Industrial Petrol	ROM 900 200/72 Diesel	ROM 900 200/76 Industrial Petrol	ROM 900 150/100 Diesel	ROM 900 155/100 Industrial Petrol
Starting system	Electric							
Engine	23,5kW / 32hp KUBOTA D1105T EU Stage IIIB Diesel	24,2kW / 33hp KUBOTA WG972 EU Stage V & EPA Tier 4 Industrial Petrol engine	23,5kW / 32hp KUBOTA D1105T EU Stage IIIB Diesel	24,2kW / 33hp KUBOTA WG972 EU Stage V & EPA Tier 4 Industrial Petrol engine	33kW / 45hp KUBOTA V1505T EU Stage IIIB Diesel	42,5kW / 58hp KUBOTA WG1605 EU Stage V & EPA Tier 4 Industrial Petrol engine	33kW / 45hp KUBOTA V1505T EU Stage IIIB Diesel	42,5kW / 58hp KUBOTA WG1605 EU Stage V & EPA Tier 4 Industrial Petrol engine
Pump	Speck P45/60		Speck P45/75		Speck P45/72		Speck P150/100	
Water tank capacity	900l							
Empty weight (excl. options)	Approx. 975kg	Approx. 950kg	Approx. 975kg	Approx. 950kg	Approx. 1025kg		Approx. 975kg	
Dimensions (l x w x h)	4150 x 1770 x 1470 mm							
HP reel drive	Hydraulically operated							
HP sewer jetting hose	80m ½"(ND13)					80m 5/8" (ND16)	80m ½"(ND13)	
Water filling hose reel	Manually operated water filling reel incl. 50m. 3/4" water hose (ND20)							



OPTIONS ROM 900

options

0478900



Remote control Professional-Remote

- Hydraulic radio remote control Professional-Remote
- 8 buttons with pressure on/off, (vacuum on/off), infinite speed control, emergency stop and battery charger for transmitter
- Work more efficiently, ergonomic, and safely
- Makes it possible to operate the machine by yourself and work from a greater distance

04790100



Remote control HeavyDuty-Remote

- Hydraulic radio remote control HeavyDuty-Remote
- 10 buttons with pressure on/off, (vacuum on/off), infinite speed control, information display, external antenna, removable rechargeable battery, emergency stop and battery charger for transmitter.
- Work more efficiently, ergonomic, and safely

0425



Rotating beacon 360° (LED) on pole

- For maximum safety
- Not possible in combination with option 'Working light on pole'



Working light (LED)

- 042400 Working light (LED) on magnetic bracket, incl. mounting set
- 04243 Working light (LED) on pole. (not in combination with option 'rotating beacon on pole')
- For illumination of your work space


042531



LED flash beam

- LED flash beam with direction indication via control unit, incl. mounting construction and mounting
- Improves visibility and increases safety
- Safer for your employees
- Reduced chances of accidents

0423

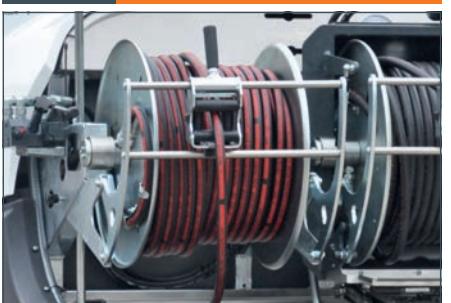

Second HP reel

- Second HP reel instead of water filling reel, complete with 3-way valve/unloader combined system. Excluding HP hose



Longer sewer jetting hose

- **04850** 100m. instead of 80m. 1/2" HP sewer jetting hose
- **04851** 120m. instead of 80m. 1/2" HP sewer jetting hose
- **048511** 90m. instead of 80m. 5/8" HP sewer jetting hose



Spray painted in specific colour

- **04057** Polyester parts spray painted in company colour (RAL, unicolor)
- **040571** Polyester parts spray painted in Metallic company colour (RAL)



Pulsation system

- **0484** Pulsation system, manually operated. For a lower water consumption and the hose advances further in the pipe and passes through bends easier

OTHER OPTIONS

Art.No. Description

04794	Unwinding of HP hose reel via remote control (only in combination with hydraulically driven HP reel and 8 or 10 button remote control)
04796	Automatic Kubota engine start on operating panel and remote control
0417	Additional cable reel with 50m. cable (only available in combination with option radiographic remote control)
04031	Extension of hydraulic system for hydraulic drive second HP reel or filling hose reel. Possible with maximum 60m. 1/2" or 80m. 3/8" HP hose. Delivery incl. fixed layered hose guiding system. Excl. HP hose
04102	Fixed hydrant filling connection equipped with STORZ coupling (cam size 66mm.) with filter on the water tank
04814	Fixed venturi type ejector combined with 66mm. STORZ filling connection, including 10m. hose, filter and bypass switch
0549	Suction-injector for anti-freeze, hose included. Equipped with quick connection
0551010	Frost protection system via air compressor; presses water out of the high pressure circuit (for frost free transport and storage)
0443	Bypass switch dry run protection
042340	Oil spillage control unit, with narrow and wide track spraying booms, plastic tank and spray gun with rotation cutter
042311	Drain package, consists of a reeling cart with two reels and 100m. 1/2" drain hose mounted on one or these reels
042320	40m. 3/8" HP steeply hose, max. 300 bar
04233	40m. 3/8" HP steeply hose, incl. quick-release valve on the hose and quick-release turnbuckle for the spray lance
04134	Adjustment of tank capacity to max. towing capacity of vehicle (500-900l.)
0434	Nozzle storage rack mounted on installation
0016	RDW vehicle approval test (Only NL) trailers
00169	TÜV vehicle approval test
001695	European Type Approval, consists of a general document to realise final end user registration
397362	Plug adapter from 7 pin (Vehicle) to 13 pin (ROM Trailer)
007005	Nozzle case ROM JetToolcase Basic (Hose ND13 & ND16 with 1/2" connection)
0070	Nozzle case ROM JetToolcase (Hose ND13 & ND16 with 1/2" connection)
00710	Nozzle case ROM JetToolcase+ (Hose ND13 & ND16 with 1/2" connection)

Parts for preventive maintenance? Save money by including a maintenance kit with your order. Consult your local partner or ROM.